

## XO2/FR (Fire Retardant)


The XO2 designation defines the incredible strength, excellent slip-resistance, superior elongation as well as unequaled U.V. and color stability of this thick-film (62-250 mils) spray-applied coating system. The FR designation means that this coating configuration meets the requirements of the Federal Aviation Rule 29.853 (a) (2) for flammability and self-extinguishing fire retardant.

### FAR 29.853 Vertical Flammability Results-12 Second Burn<sup>1</sup>

Burn Length	0.10/inch	After Flame Removed	0.00/Sec.
Drip Time to Flame Extinguish/Sec.			0.00/Sec.

The Scorpion XO2/FR protective coating system is an acrylic-polyurethane that is spray-applied to aluminum, concrete, fiberglass, metal and wood.

*Imagine what you can offer your clients with XO2/FR's unlimited applications.*

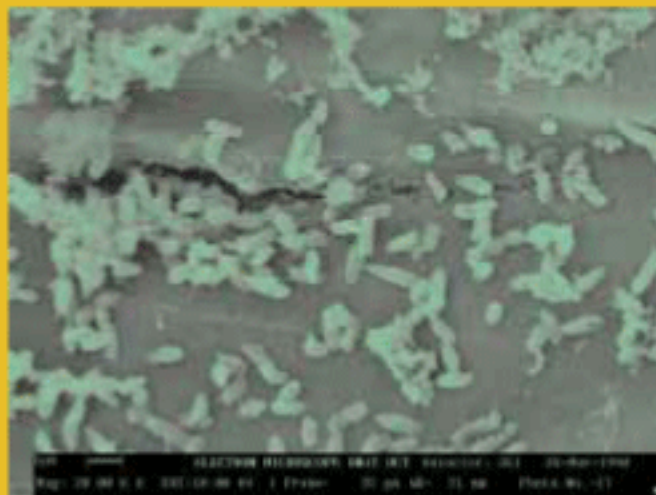

*Walls - Ceilings - Storage Compartments - Equipment Protection  
Components Protection - A Protective Coating System where you need it.  
Applied by your staff with simple, inexpensive equipment.*



**Scorpion Protective Coatings, Inc.**  
6184 South US 231  
Cloverdale, Indiana 46120  
800-483-9087  
[www.scorpioncoatings.com](http://www.scorpioncoatings.com)

<sup>1</sup> Testing conducted by Flame-Out, Inc., FAA Approved Test Center, 113 North 2nd, P.O. Box 96, Pleasant Dale, NE 68423 (402) 795-5335, email: [Flameout@inetnetbr.com](mailto:Flameout@inetnetbr.com)